OPERANDO®

LAMINATES

PREMIUM CORE POLYMER LAMINATES

INDIA'S FIRST & ONLY 180° BENDABLE ANTI SCRATCH LAMINATES

Rafahia

SHIMMER METALIIC MATT

Made with High Tech German Standards

MAKE IN INDIA

WEBSITE

@operandolaminates

sales@operandolaminates.com

WWW.OPERANDOLAMINATES.COM

ABOUT US

OPERANDO LAMINATES®

PREMIUM CORE POLYMER LAMINATES


At Operando Laminates, we are proud to be India's only manufacturer of **Core Polymer** Luxury Laminates, renowned for quality and service. Using advanced highly Engineered Polymer sheets, our laminates enhance interior spaces with cutting-edge **German standards** and over 30 years of Plastic Manufacturing expertise. Unlike imported products, we offer a 100% quality guarantee.

Explore our premium, **PVC-free** laminates at Operando Laminates and experience the future of luxury surfaces.


Rafahia

SHIMMER METALLIC MATT

ADVANCE FEATURES

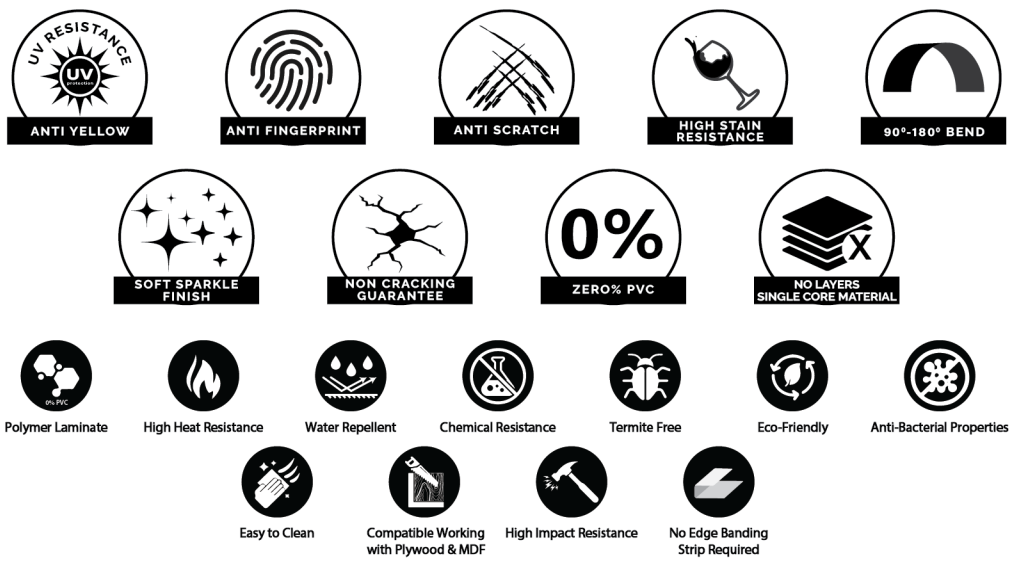

APPLICATION

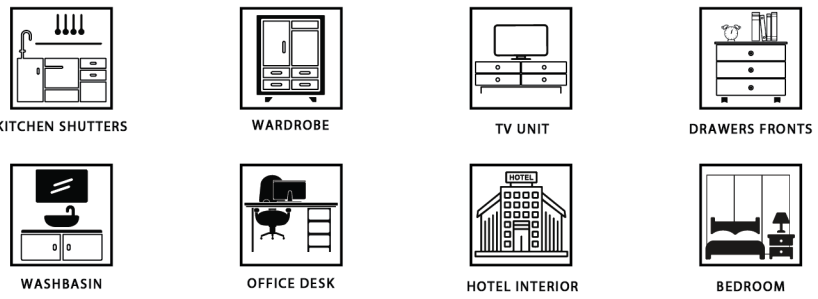



MADE IN INDIA

INDIA'S PREMIUM 180 DEGREE BENDABLE ANTI-SCRATCH POLYMER LAMINATE MANUFACTURER!



Starstream OSMM-629-BR



Asteroid Mocha OSMM-626-BR

Pure Polymer

180° Bendable

Eco Friendly

Anti Yellow

Stain Resistance

Anti Scratch

Embrace the unparalleled assurance of meticulously tested anti-scratch laminates leaving no scratches behind



Moon Glow OSMM-617-GR



Centauri OSMM-628-BR

Pure Polymer

180° Bendable


Eco Friendly

Anti Yellow

Stain Resistance

Flexible Bending

Seamless flexibility with a 180˚ bend, free from cracks or shade variations, eliminating the need for edge banding strips

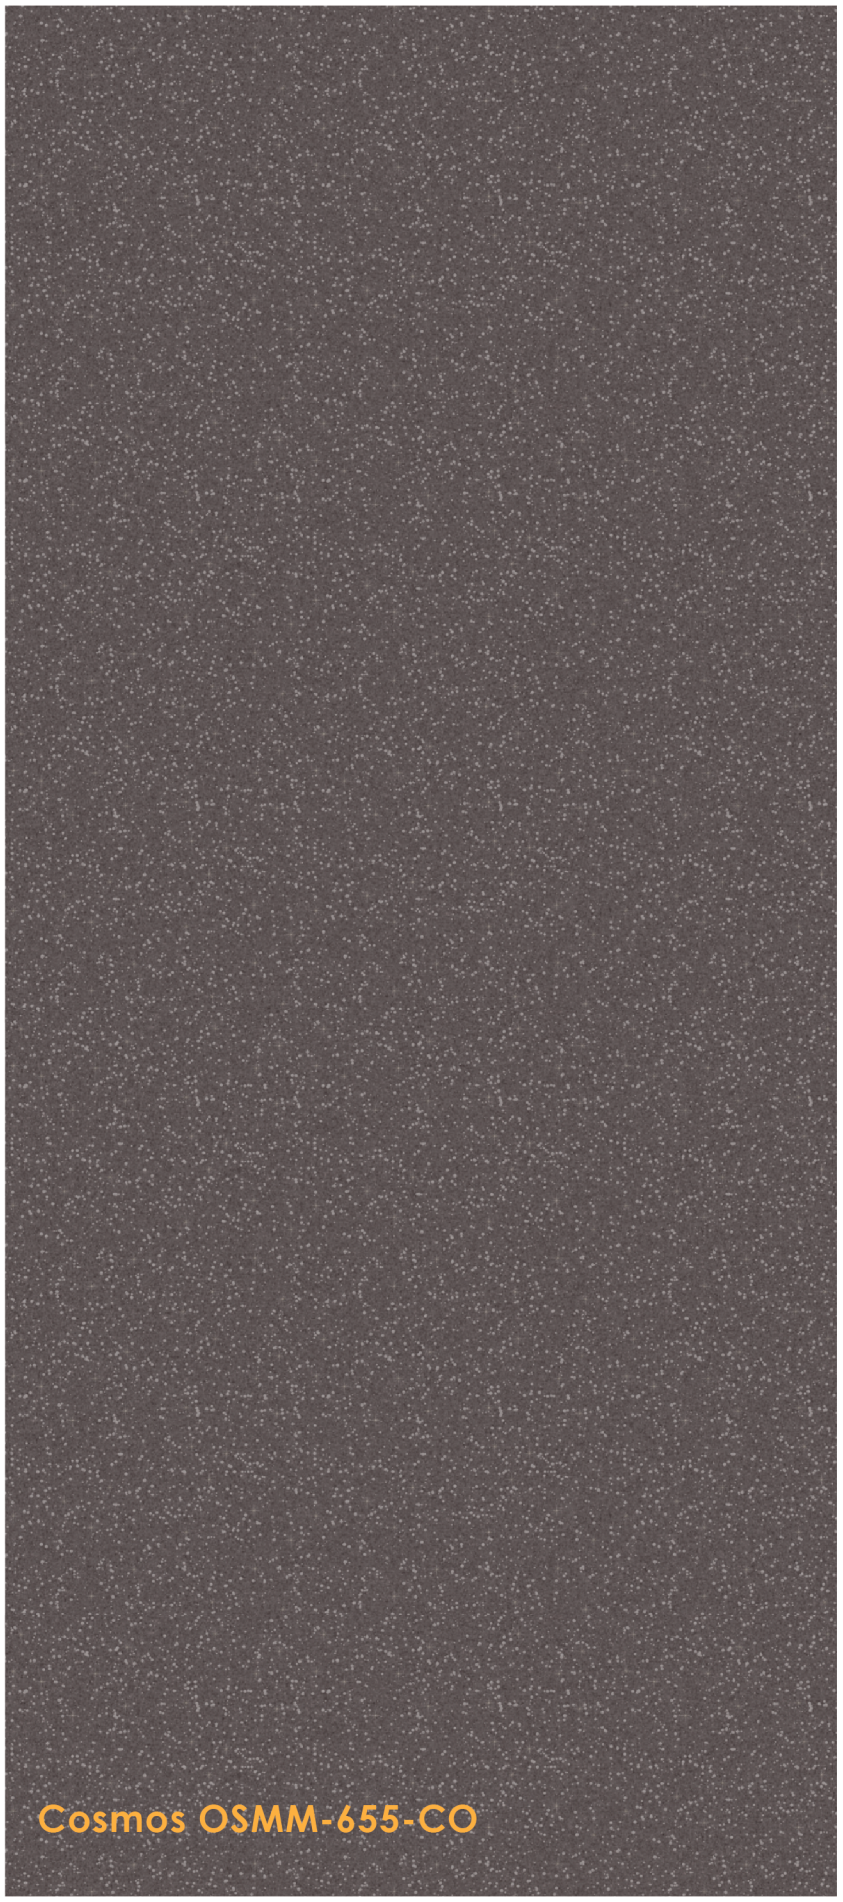

Cosmos OSMM-655-CO



Stellar OSMM-652-CO

Pure Polymer

180° Bendable

Eco Friendly

Anti Yellow

Stain Resistance

High Stain Resistance

Unravel the magic of spotless surfaces with our impeccable laminates



Mercury OSMM-653-GR



Orbit Grey OSMM-614-GR

Pure Polymer

180° Bendable

Eco Friendly

Anti Yellow

Stain Resistance

WaterProof

Enjoy the assurance of 100% waterproof protection Laminates ensuring durability and resilience against life's spills and splashes



Star Cluster OSMM-627-BR



Mars Dust OSMM-654-BR

Pure Polymer

180° Bendable

Eco Friendly

Anti Yellow

Stain Resistance

Eco-friendly

Experience Eco-Conscious Elegance with Our Laminates



Pluto OSMM-651-CO



Meteor Grey OSMM-625-GR

Pure Polymer

180° Bendable

Eco Friendly

Anti Yellow

Stain Resistance

Anti Yellow

Operando Laminates are characterized by higher UV Colour Fastness and exhibit a luxury finish



Solar Sand OSMM-619-GR



Euphoria OSMM-656-CO

Pure Polymer

180° Bendable

Eco Friendly

Anti Yellow

Stain Resistance

Termite Free

Operando Laminates offer a termite-free guarantee,
protecting your spaces with unmatched durability and peace of mind



Pure Polymer | 180° Bendable | Eco Friendly | Anti Yellow | Stain Resistance

Why Polymer Laminates are the Best Choice compare to other laminates?

Parameters	PVC	PET-G	ASA	ACRYLIC	POLY
Best Quality + Cost Effective	NO	NO	NO	NO	**YES**
Eco Friendly	NO	NO	YES	NO	**YES**
Matt Life	Short	Short	Medium	Medium	**Long**
Durable	2-3 months	1 year	1 year	2 years	**10 years**
Rigid / Flexible	Rigid	Rigid	Rigid	Rigid	**Flexible**
Bendable	0^0	0^0	0^0	0^0	**180^0**
Weight	Heavy	Heavy	Medium	Medium	**Light**
UV / Anti-Yellow	Low	Low	Medium	Medium	**High**
Weather Resistance	Bad	Good	Good	Good	**Excellent**
Heat Resistance	Bad	Good	Good	Good	**Excellent**


GENERAL USE & CARE GUIDE:

Operando laminates are designed for easy maintenance and durability. Follow these guidelines for optimal performance:

1. **Stain Removal:** For stubborn stains, use mild household glass cleaners like Colin. Gently wipe the surface with a non-abrasive cloth.
2. **Avoid Abrasive Cleaners:** Refrain from using abrasive liquid cleaners, bleaches, or solvents, as they may harm the laminate surface. Clean with water and a non-abrasive cloth.
3. **Surface Recommendation:** Glossy surfaces are best suited for vertical applications.
4. **Thinner Usage:** Do not apply thinner to Operando laminates.

INSTALLATION INSTRUCTIONS:

1. Before use, stir the POLYBOND adhesive and do not mix water.
2. Clean the dust particles from the surface of the substrate (plywood, MDF, chipboard) with a cloth, soft brush, sponge or sandpaper.
3. Apply the adhesive evenly with a brush, roller or adhesive spray on both the laminate and the substrate (plywood. MDF, chipboard).
4. When pressing on the laminate base (plywood, MDF, chipboard), use a soft-pressure roller or a normal pressing technique. Pressing must be done from the center of the panel and moved to the sideline and corners of the panel
5. Make sure the laminate is sufficiently pressed for almost 24-30 hours to reach full bond strength.

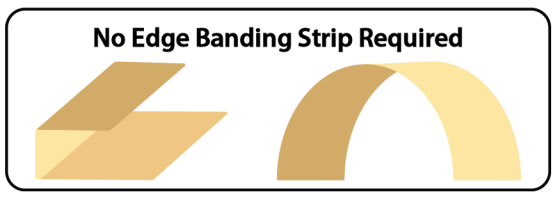

CERTIFIED ISO 9001:2015 COMPANY

OUR PRODUCTS:

LUXURIÓ Super Gloss Brush Metallic | Rafahia CHIFFON + SUPER + SHIMMER METALLIC MATT

WEBSITE QR

@operandolaminates

sales@operandolaminates.com

Disclaimer:
Plywood with high moisture content should not be used. Avoid using ply with an uneven surface. Inferior quality adhesive should be avoided. Apply sufficient pressure during installation. It is not recommended to paste sheets on the printed/branding area of the plywood. Our laminates boast an anti-scratch rating of up to 3.5 hardness. Please handle with care for optimal longevity.

Limited Warranty:
Operando Products undergo rigorous testing to ensure they are reasonably free of defects. When used and fabricated correctly, they will comply with applicable manufacturing specifications within realistic deviations. Prior to installation, we advise customers to thoroughly inspect products.
The warranty excludes defects or non-compliance due to:
Improper handling, transportation, or storage of laminates. Incorrect installation or unintended usage. Lack of maintenance or exposure to high temperatures. Unauthorized alterations or outdoor applications. Exchanges are provided under reasonable circumstances. This brochure serves as a presentation guide, with actual colors potentially differing.